


Flat – All Types

20'

ISO Size Type Code: 8'6" high
(22 P3)
(22 P8)

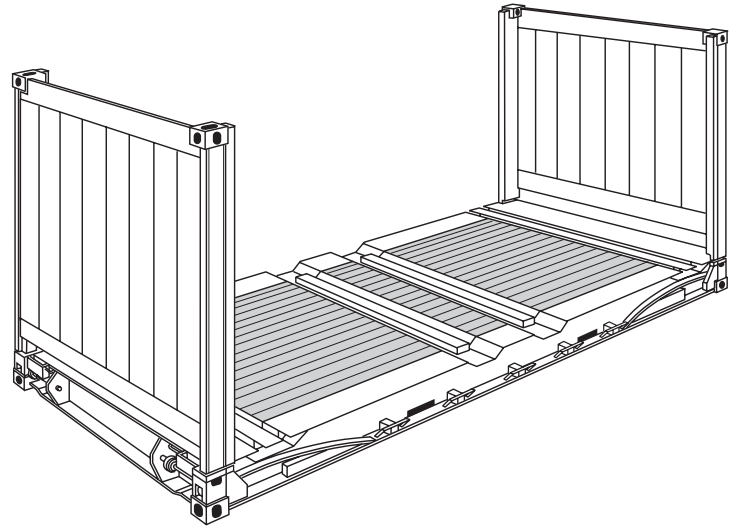

- Especially for heavy loads and over-size cargo as well as project cargo.
- Fork-lift pockets for loaded containers.
- Numerous very strong lashing devices on the corner posts, longitudinal rails and on the floor or base ends. Lashing devices on the longitudinal rails have a permissible load of 2 000 kg up to 5 000 kg each.
- **Maximum payload can only be used if distributed over the total floor area of flatrack. If concentration of heavy load on a small part of floor area is required please contact Cigisped office for stowage advice.**
- Collapsible flatracks, provided with spring assisted endwalls.
- Collapsible flatracks, provided with twistlocks to interlock 7 units into a 8'6" high pile.
- Flats are delivered without stanchions. If stanchions are required please inform us upon booking.

Cigisped: ph: +39 010 815873 fx: +39 010 882393 cigisped@cigisped.it www.cigisped.it

Flat

20'

Construction	Inside Dimensions						Weights		
	Length of floor	Length between posts	Width of floor	Width between side rails	Height floor to top face	Height of bottom	Max. Gross	Tare	Max. Payload
	mm ft	mm ft	mm ft	mm ft	mm ft	mm ft	kg lbs	kg lbs	kg lbs

8'6" high

Flat/Platform with flushfolding endwalls and softwood floor	5 850 19'2 ¹ / ₄ "	5 638 18'6"	2 438 8'	2 208 7'2 ⁷ / ₈ "	2 233 7'3 ⁷ / ₈ "	370 1'2 ¹ / ₂ "	40 000 88 184	2 940 6 482	37 060 81 702
Steelframe with collapsible endwalls and softwood floor	5 950 19'6 ¹ / ₄ "	5 675 18'7 ³ / ₈ "	2 428 7'11 ⁵ / ₈ "	2 213 7'3 ¹ / ₈ "	2 270 7'5 ³ / ₈ "	316 1'3 ¹ / ₈ "	33 000 72 752	2 600 5 732	30 150 67 020
Flat/Platform with flushfolding endwalls and softwood floor	6038 19'9 ³ / ₄ "	5638 18'6"	2 435 7'11 ⁷ / ₈ "	2 208 7'2 ⁷ / ₈ "	2235 7'4"	370 1'2 ¹ / ₂ "	30 480 67 200	2 520 5 560	27 960 61 640
	6038 19'9 ³ / ₄ "	5612 18'4 ⁷ / ₈ "	2 438 8'	2 210 7'3"	2213 7'3 ¹ / ₈ "	370 1'2 ¹ / ₂ "	34 000 74 950	2 740 6 040	31 260 68 910

Remarks:

1) ISO size type code: 22 P3