


# High Cube General Purpose Container

45'

ISO Size Type Code: L5 GP  
(L5 G1)

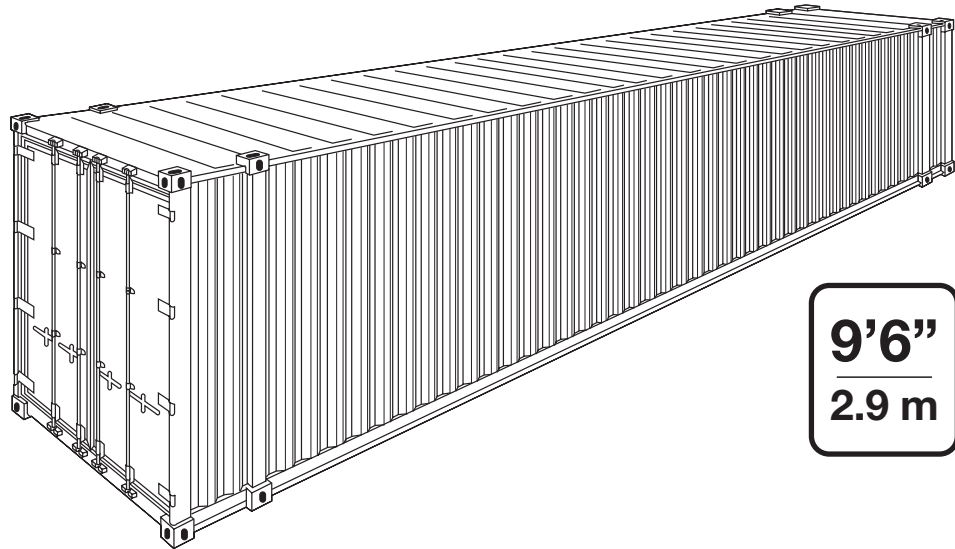

9'6"  
2.9 m

- Especially for voluminous cargo up to max. 2.70 m (8'10<sup>1</sup>/<sub>4</sub>" (see table).
- Lashing devices have a permissible load of 1000 kg (2 205 lbs) each.
- **Extended by length.**
- 10 Lashing rings on the top and bottom longitudinal rails. Total 40 piece.
- Floor Height 170 mm - 5mm (Ground level to interior floor surface)
- **Consider overheight for inland transportation**
- Units built with corner castings at 40 ft and 45 ft positions.

**Cigisped: ph: +39 010 8607214 +39 010 815873 - [cigisped@cigisped.it](mailto:cigisped@cigisped.it) - [www.cigisped.it](http://www.cigisped.it)**

## High Cube General Purpose Container

Construction	Inside Dimensions			Door Opening		Weights			Capacity m <sup>3</sup> cu.ft
	Length	Width	Height	Width	Height	Max. Gross	Tare	Max. Payload	
	mm ft	mm ft	mm ft	mm ft	mm ft	kg lbs	kg lbs	kg lbs	

### 9'6" high

Steel container with corrugated walls and wooden floor	13 532 44'4 <sup>3</sup> / <sub>4</sub> "	2 414 7'11"	2 694 8'10"	2 374 7'9 <sup>1</sup> / <sub>2</sub> "	2 585 8'5 <sup>3</sup> / <sub>4</sub> "	34 000 74 960	4 950 10 910	29 050 64 050	88,4 3 122
--	--	----------------	----------------	--	--	------------------	-----------------	------------------	---------------